

Northumbria Research Link

Citation: Aravinda, L. S., Bhat, K. Udaya, Wei, Jiacheng, Inam, Fawad and Bhat, Badekai Ramachandra (2015) Flexible Binder free electrode for ultracapacitor. In: 5th Chemical Nanoscience Symposium (CNSN-5), 26 March 2015, Newcastle upon Tyne.

URL: <http://conferences.ncl.ac.uk/chemnanosymposium5/cn...>
<<http://conferences.ncl.ac.uk/chemnanosymposium5/cnsn-5-keyinformation/#programme>>


This version was downloaded from Northumbria Research Link:
<http://nrl.northumbria.ac.uk/22283/>

Northumbria University has developed Northumbria Research Link (NRL) to enable users to access the University's research output. Copyright © and moral rights for items on NRL are retained by the individual author(s) and/or other copyright owners. Single copies of full items can be reproduced, displayed or performed, and given to third parties in any format or medium for personal research or study, educational, or not-for-profit purposes without prior permission or charge, provided the authors, title and full bibliographic details are given, as well as a hyperlink and/or URL to the original metadata page. The content must not be changed in any way. Full items must not be sold commercially in any format or medium without formal permission of the copyright holder. The full policy is available online: <http://nrl.northumbria.ac.uk/policies.html>

This document may differ from the final, published version of the research and has been made available online in accordance with publisher policies. To read and/or cite from the published version of the research, please visit the publisher's website (a subscription may be required.)

www.northumbria.ac.uk/nrl



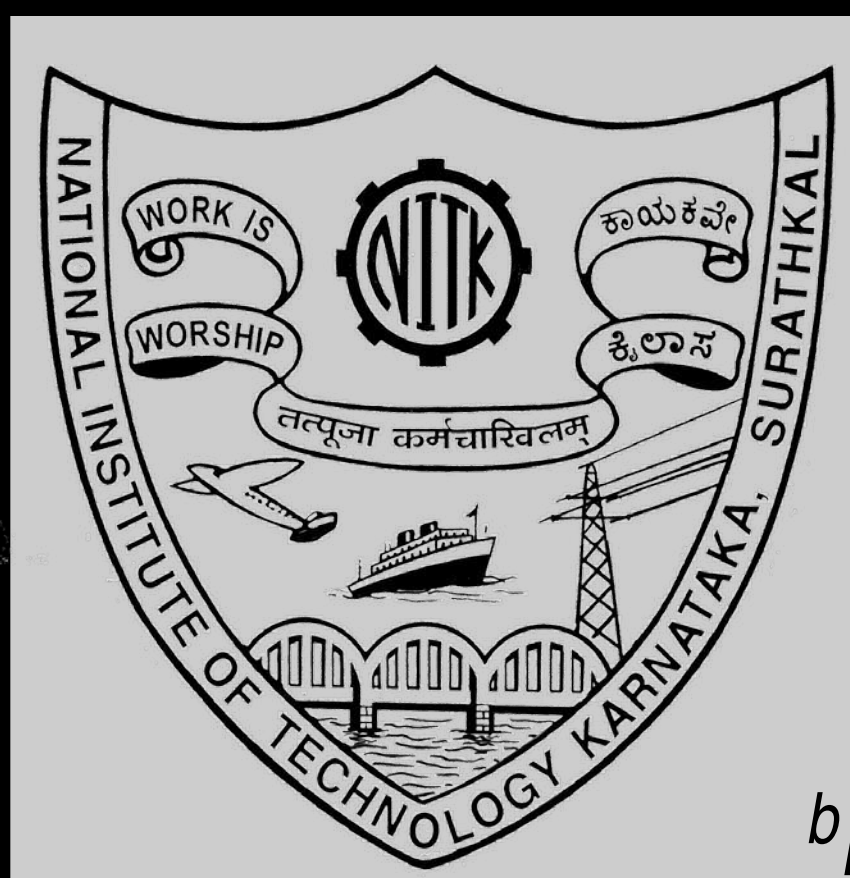

Flexible Binder free electrode for Ultracapacitor



L. S. Aravinda^a, K. Udaya Bhat^b, Jiacheng Wei^c, Fawad Inam^c and B. Ramachandra Bhat^{a*}

^aCatalysis and Materials Laboratory, Department of Chemistry,

National Institute of Technology Karnataka, Surathkal, D. K., Karnataka, India-575 025.

^bDepartment of Materials and Metallurgical Engineering, National Institute of Technology Karnataka, Surathkal, D.K, Karnataka, India-575 025

^cNorthumbria University, Faculty of Engineering and Environment, Department of Mechanical and Construction Engineering, Newcastle upon Tyne NE1 8ST, United Kingdom

•E-mail address: brchandra@gmail.com


INTRODUCTION

Energy is the basic need required for the human survival and the survival of other countless species on this mother planet. Early human beings used wood as stored energy resource in order to get heat and light. Later as the civilization progresses the human quest of finding more and more energy source dramatically increased in order to fulfill their desire. Over the thousands of years human civilization used the stored energy what is now referred to as fossil fuels. This chemical energy stored within the earth's crust from organic materials which have decayed over many millennia. This chemical energy is able to be converted to other forms of usable energy, including that of electrical energy. But today this primary energy source is under serious extinction. Global warming became an alarming bell for the human society. So one has to think seriously about storing of available energy and retrieving it whenever required. Supercapacitor are receiving remarkable attention as an energy storage device, and being used various applications. Carbon based materials are widely used as electrodes in electrical double-layer capacitor (EDLCs). Supercapacitor performance is basically determined by the structural and electrochemical properties of electrodes. Various types of carbon materials like activated carbon (AC), carbon nanotubes, graphene were used as electrode material for EDLC, out of which activated carbon was found to be the cheapest material.

SYNTHESIS OF ACTIVATED CARBON ELECTRODE

- The traditional electrode fabrication involves the mixing of active material powder with a polymer binder to form a sheet or film, and it can be used as electrode material. However, the incorporation of the polymer binder introduces several disadvantages and increases the resistance for the movement of ions.
- Electrodes used for the electrochemical measurements were prepared by dispersing the as AC in ethanol and then resulting solution was spray coated on conducting carbon fabric keeping the nozzle distance to substrate 3mm at constant time for 5min. The prepared electrodes were vacuum dried at 40°C. Stainless steel plates were used as current collector, polypropylene as separator and 1M sulphuric acid as electrolyte in the supercapacitor electrode assembly. A symmetric model capacitor was constructed using two AC films as electrode.
- Electrochemical characterizations of the electrode were carried out by cyclic voltammetry (CV), electro-chemical impedance spectroscopy (EIS) and galvanostatic charge-discharge studies. All the electrochemical studies were carried out using an Autolab electrochemical system (ECO Chemie BV, Netherlands). AC impedance measurements were made in the frequency range of 0.01–10⁶ Hz.

A SYMMETRIC ULTRACAPACITOR MODEL


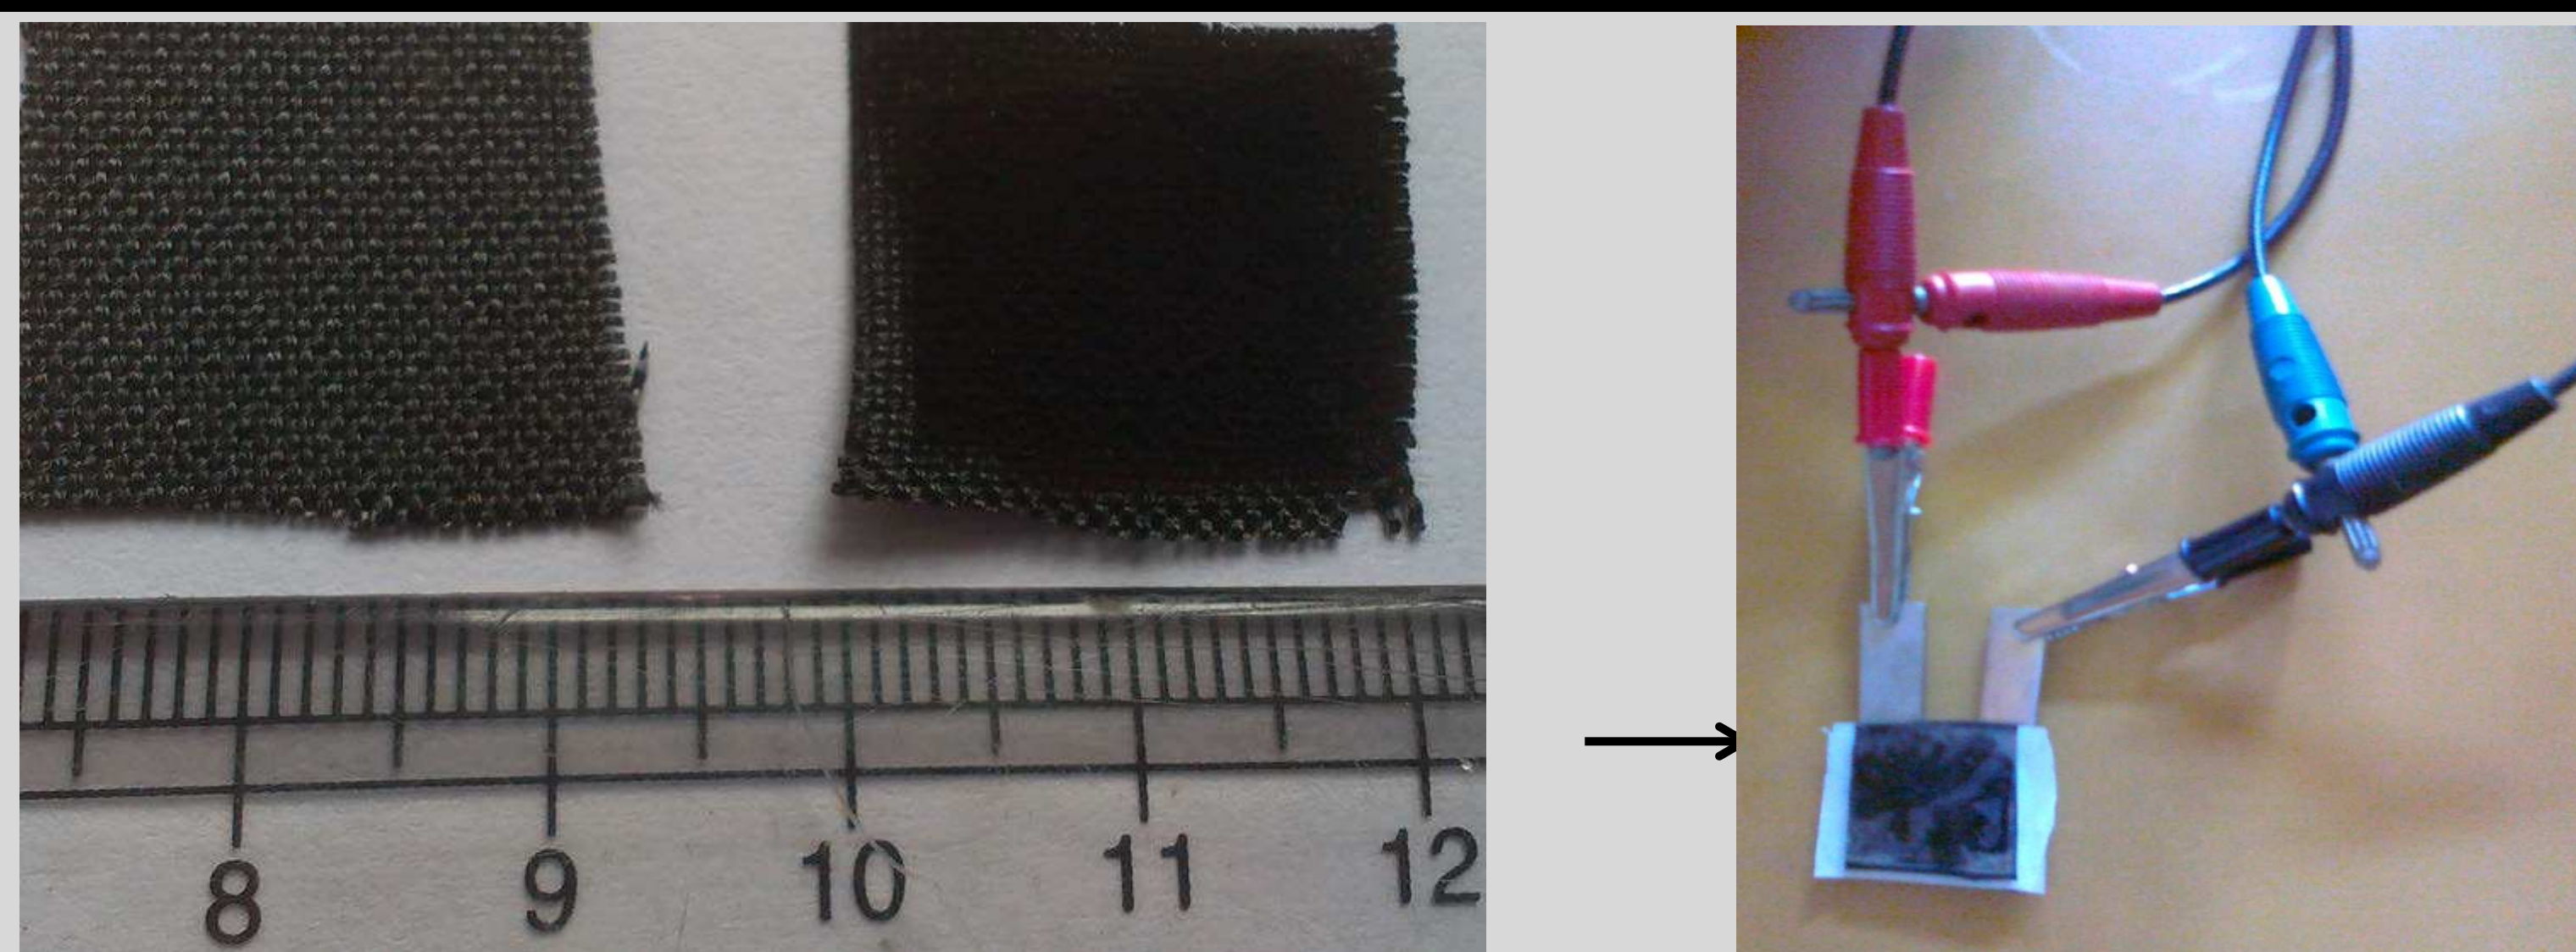


References:





- [1] A.K. Shukla, S. Sampath, K. Vijayamohanan, Electrochemical supercapacitors: Energy storage beyond batteries, Current science 79 (2000) 1656-166
- [2]. C. Ye, Z. M. Lin, S. Z. Hui, Electrochemical and Capacitance Properties of Rod-Shaped MnO₂ for Supercapacitor, J. Electrochem. Soc. 152 (2005) A1272-A1278.

RESULTS AND DISCUSSION

FESEM Image of AC

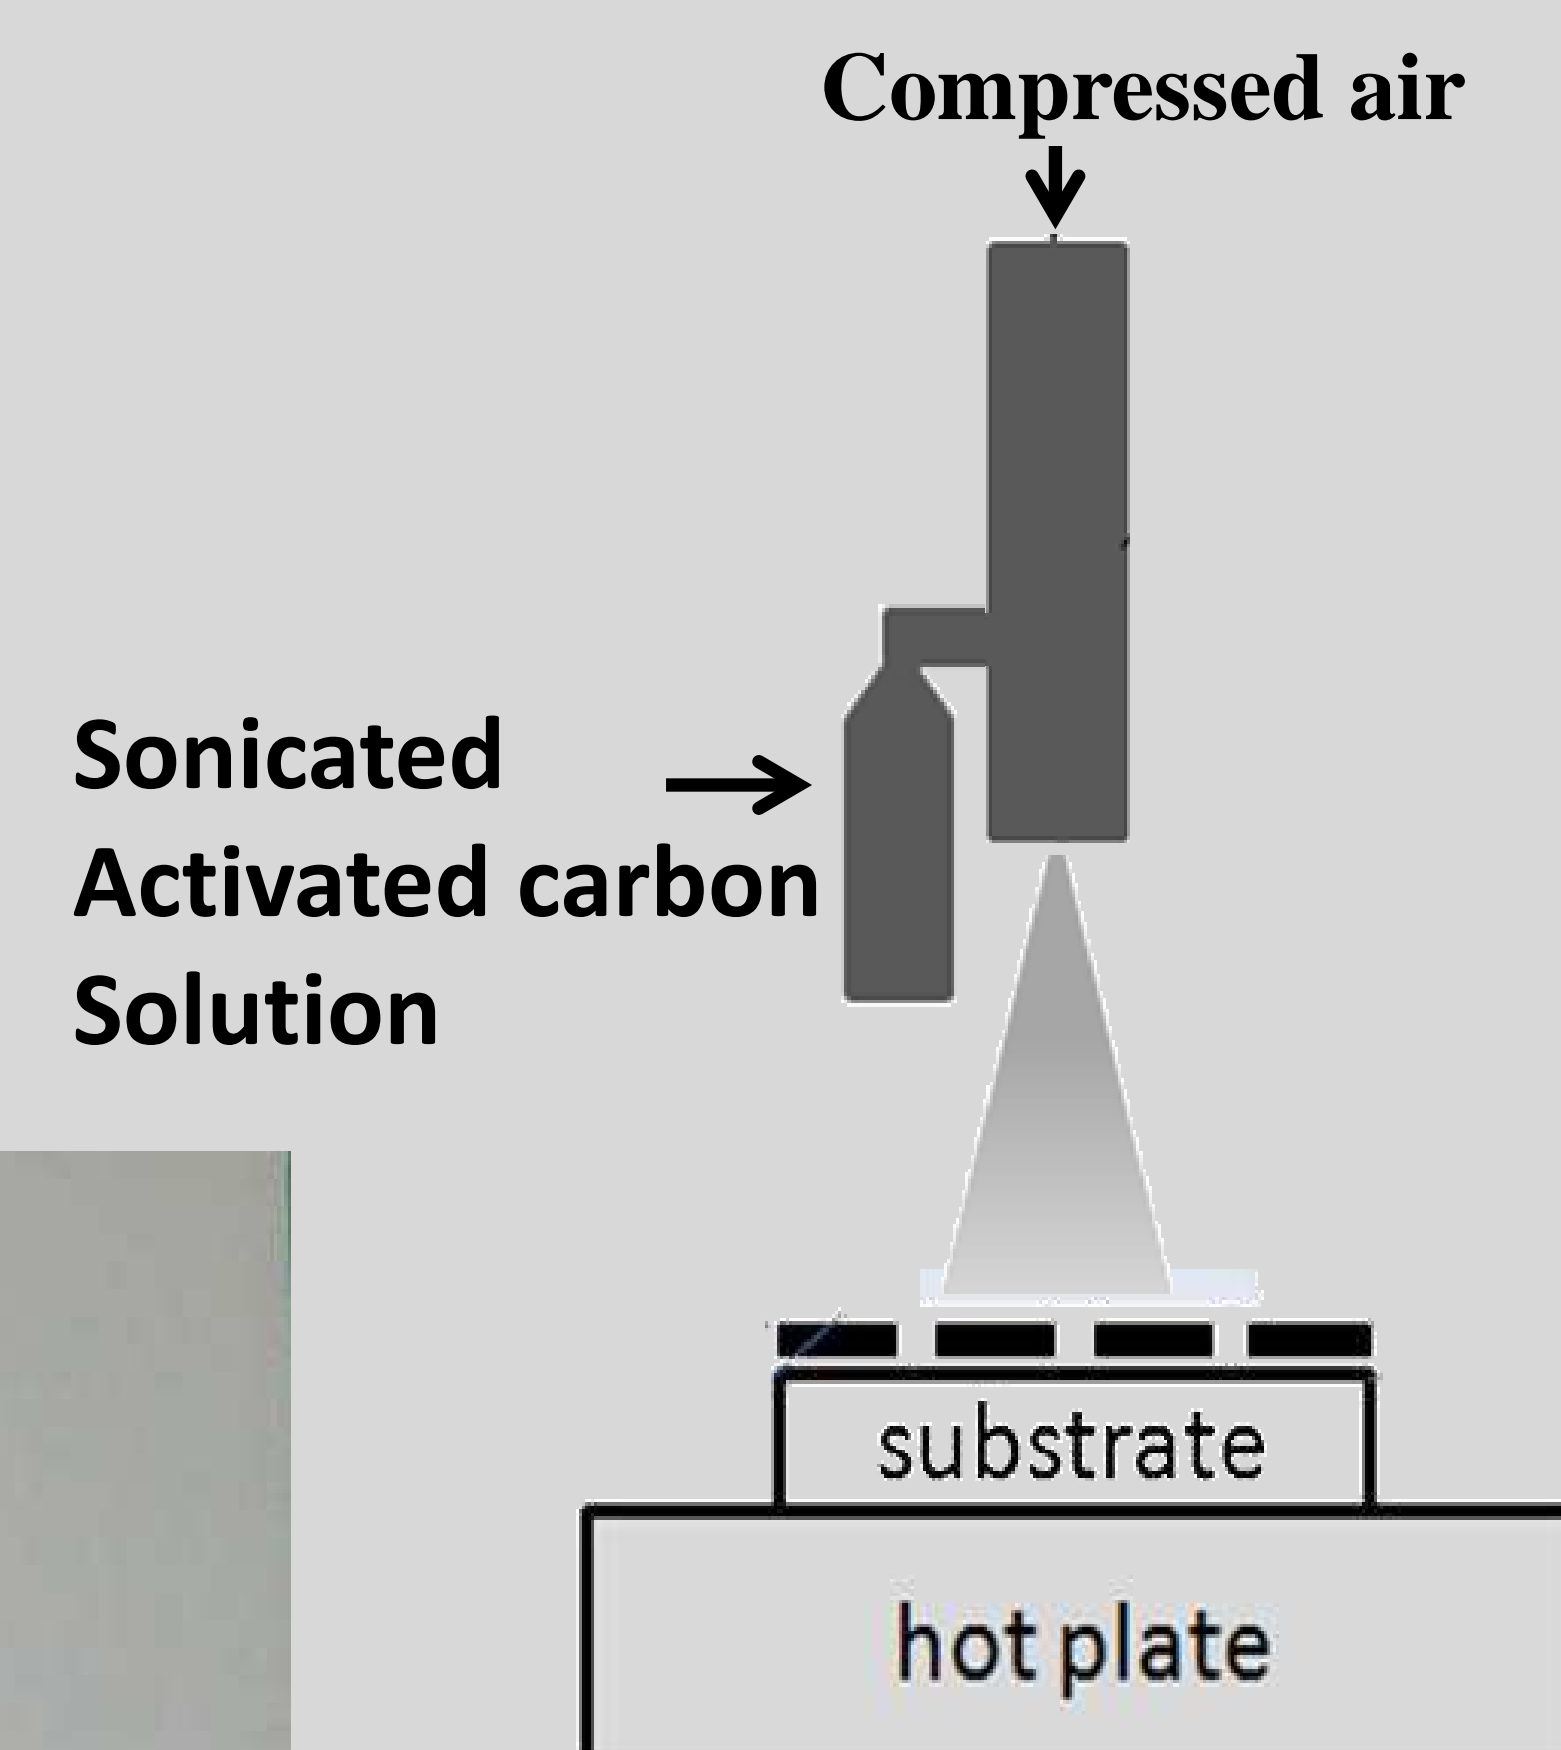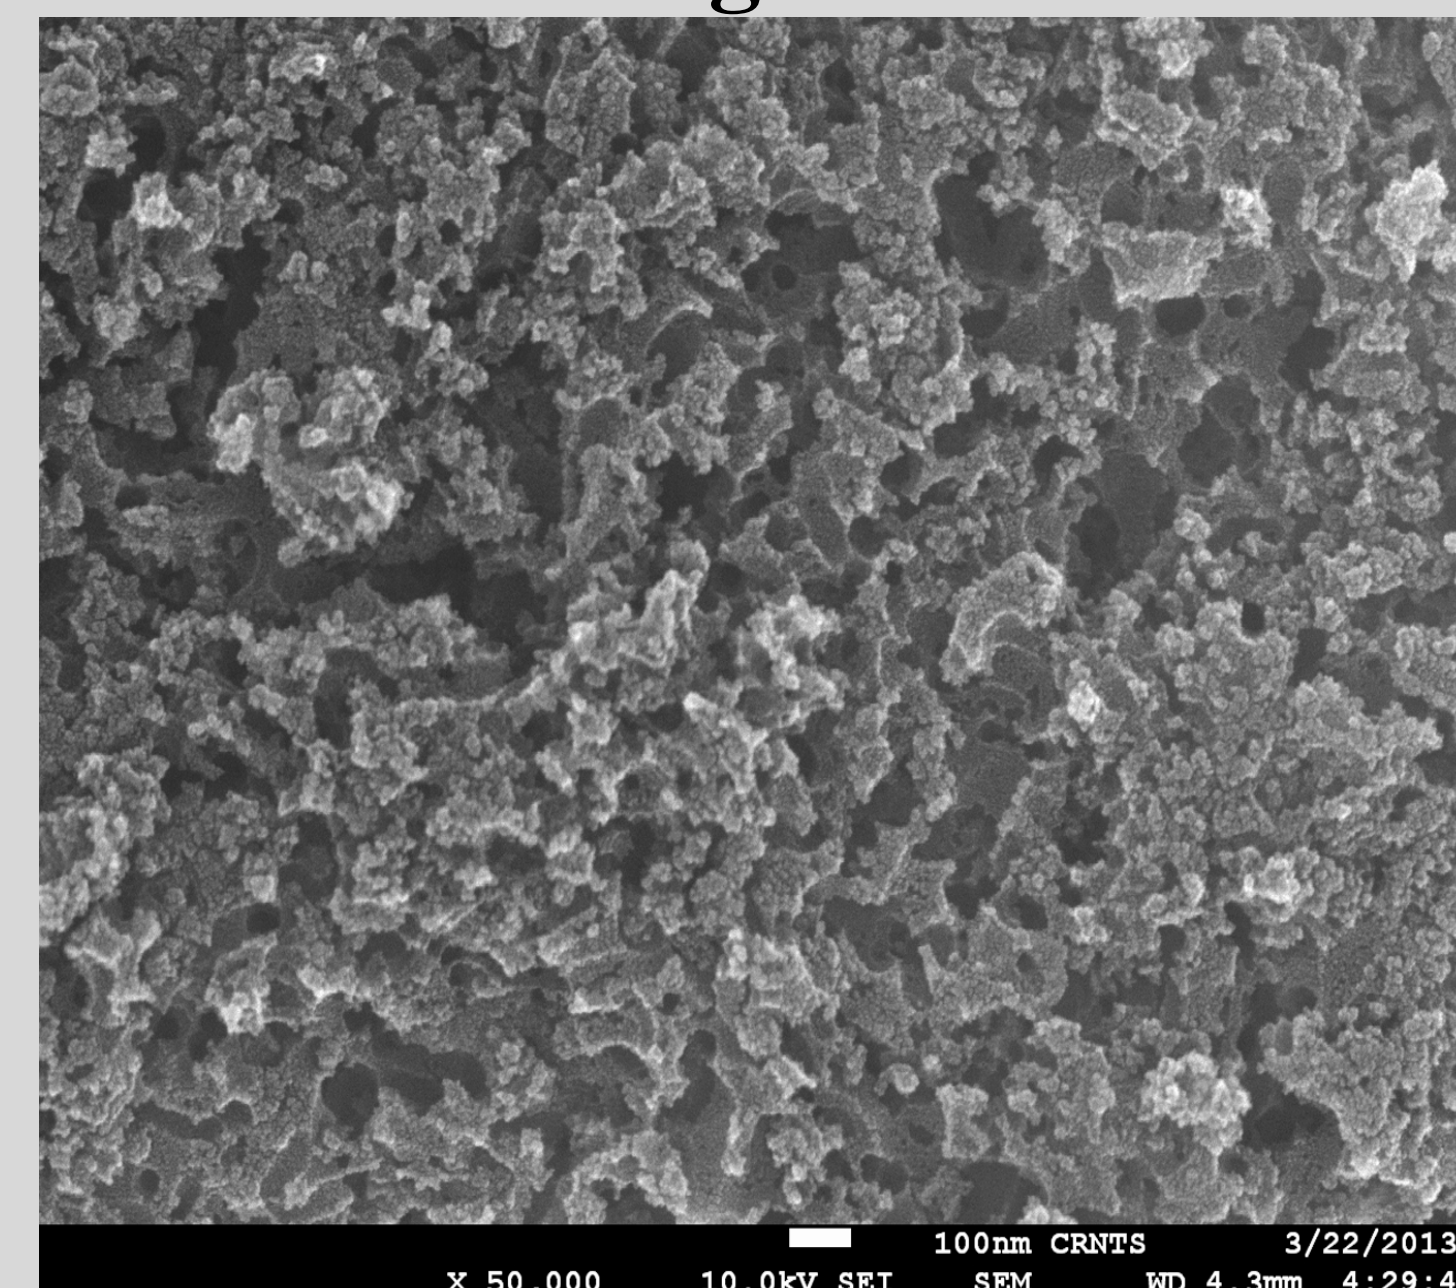

ELECTROCHEMICAL CHARACTERIZATION

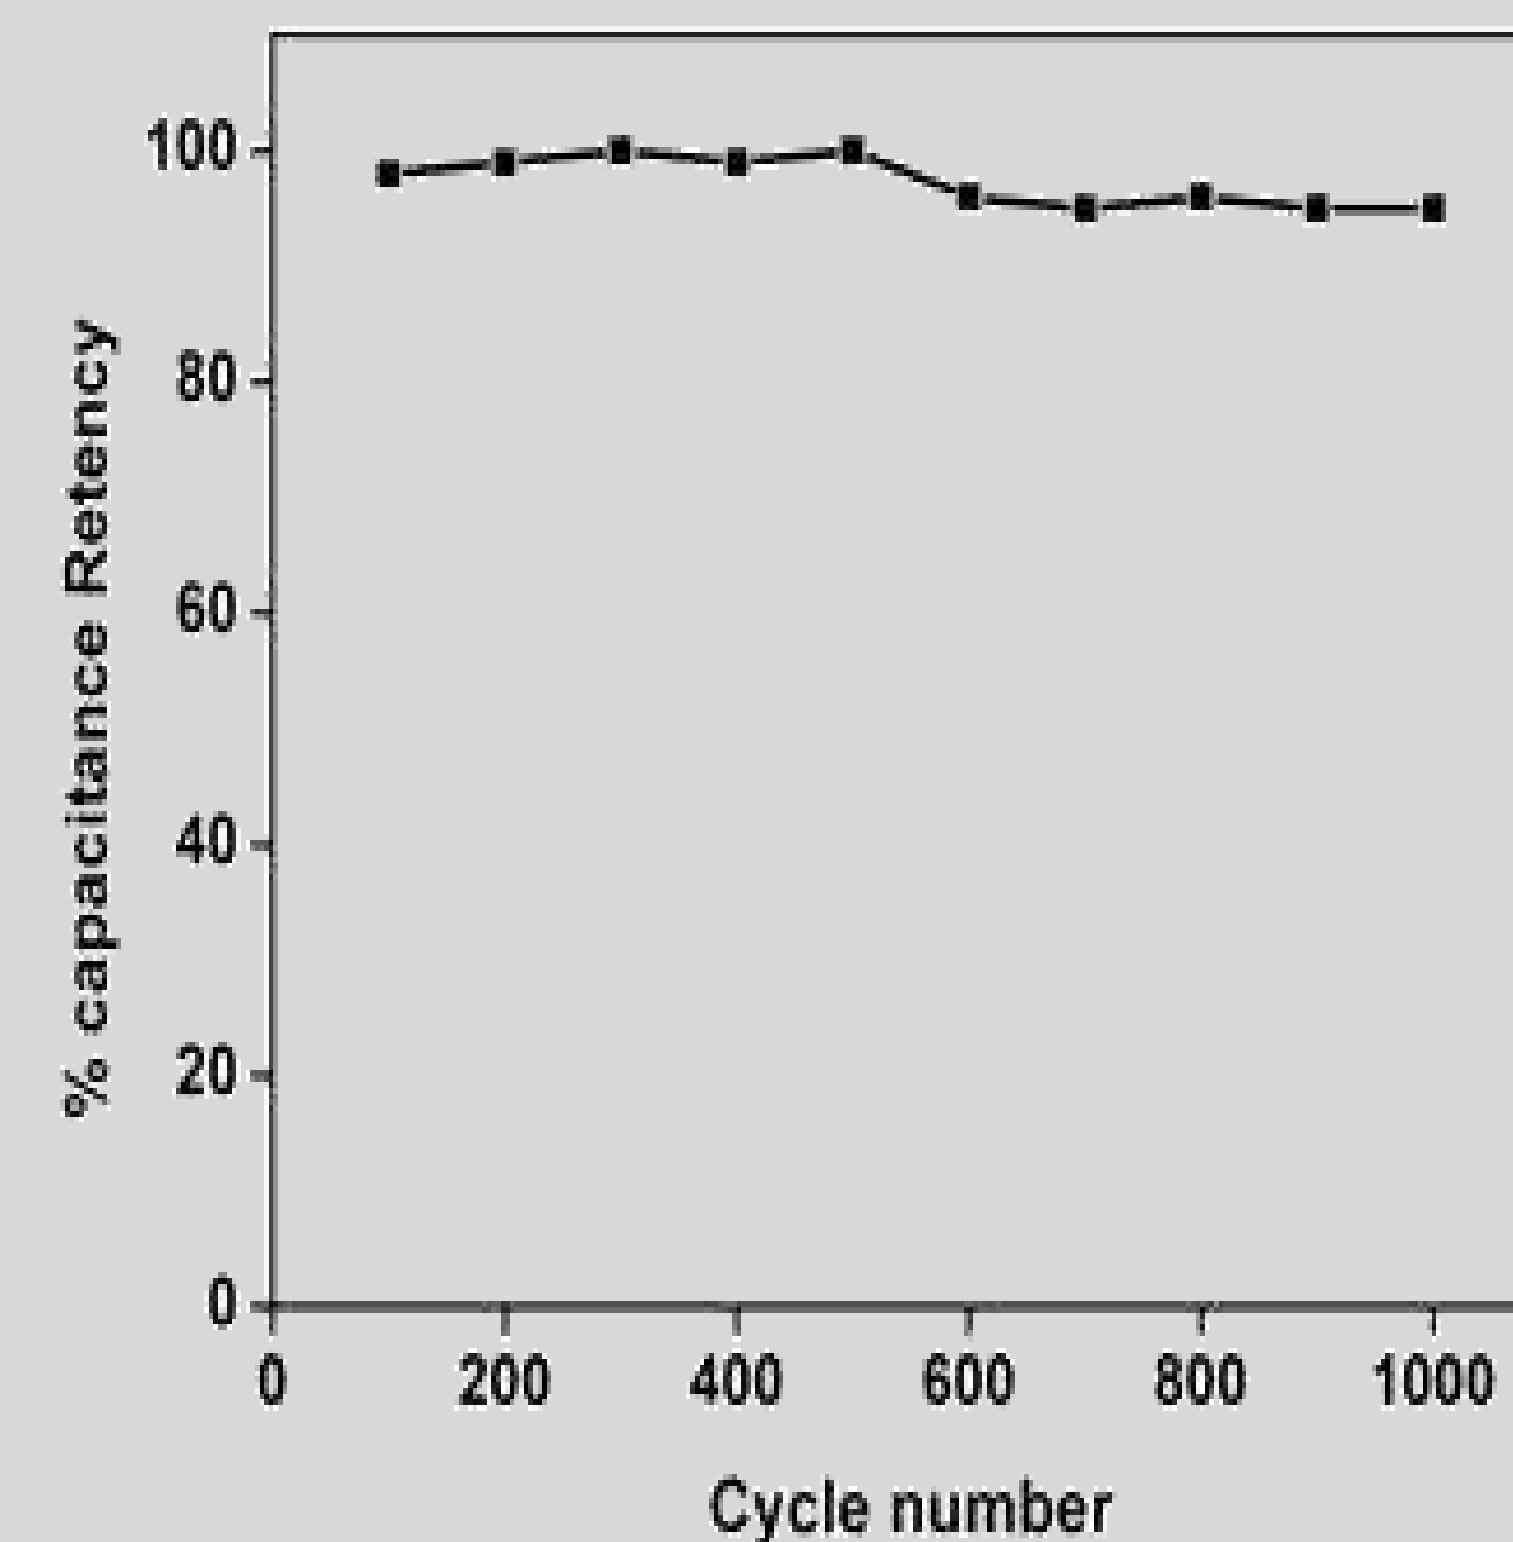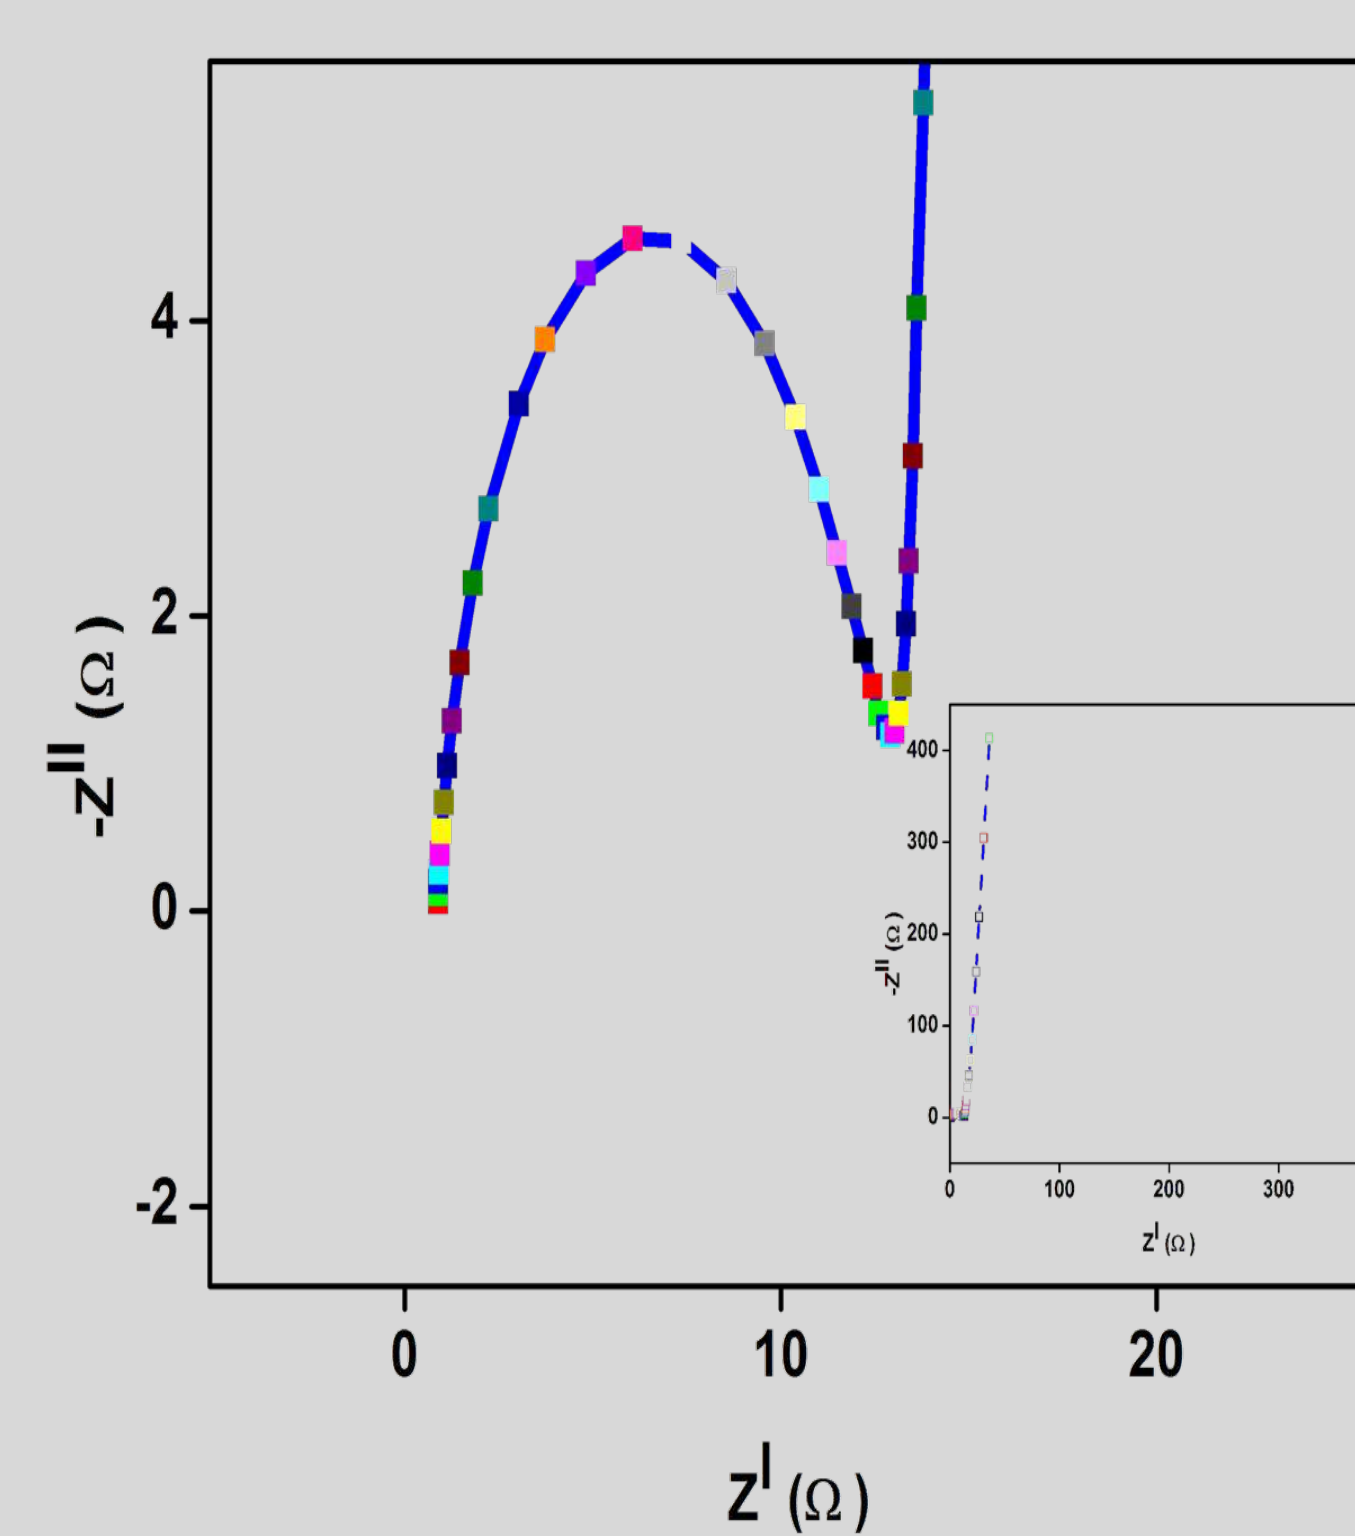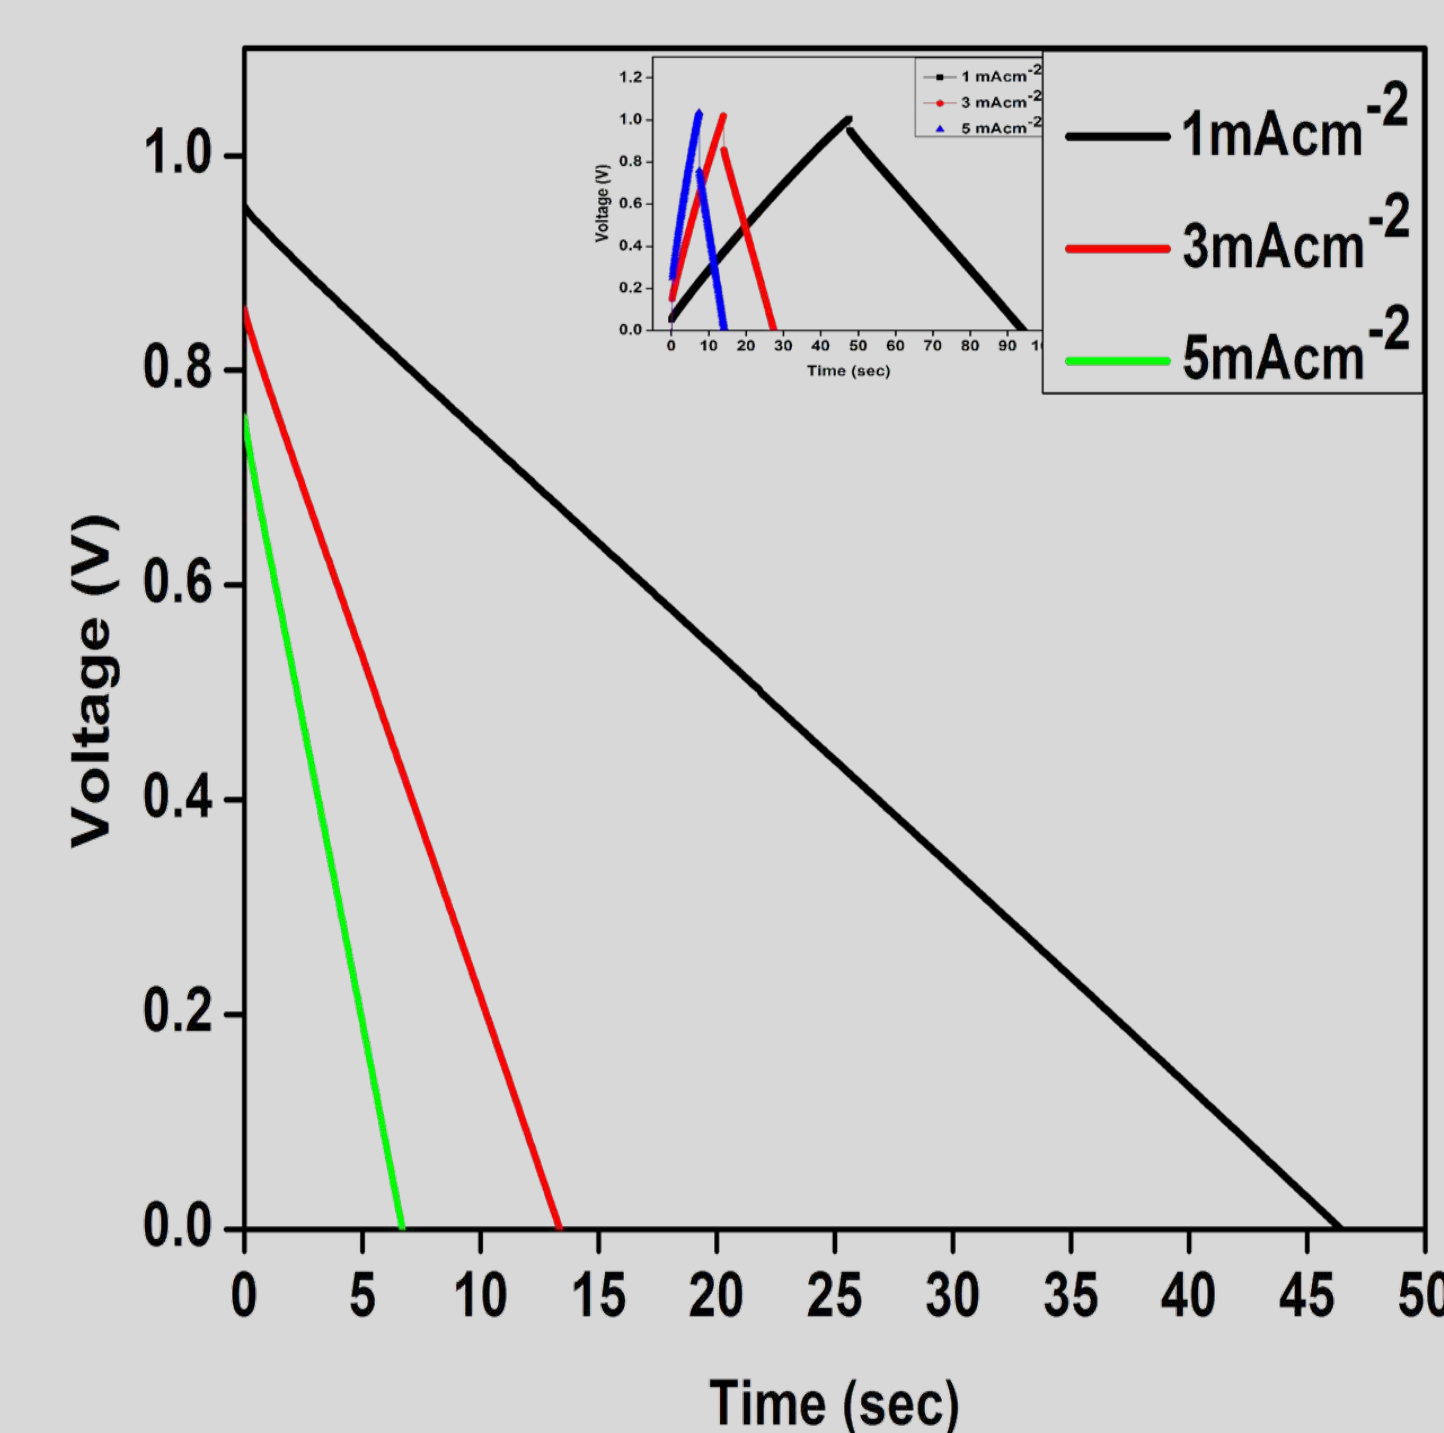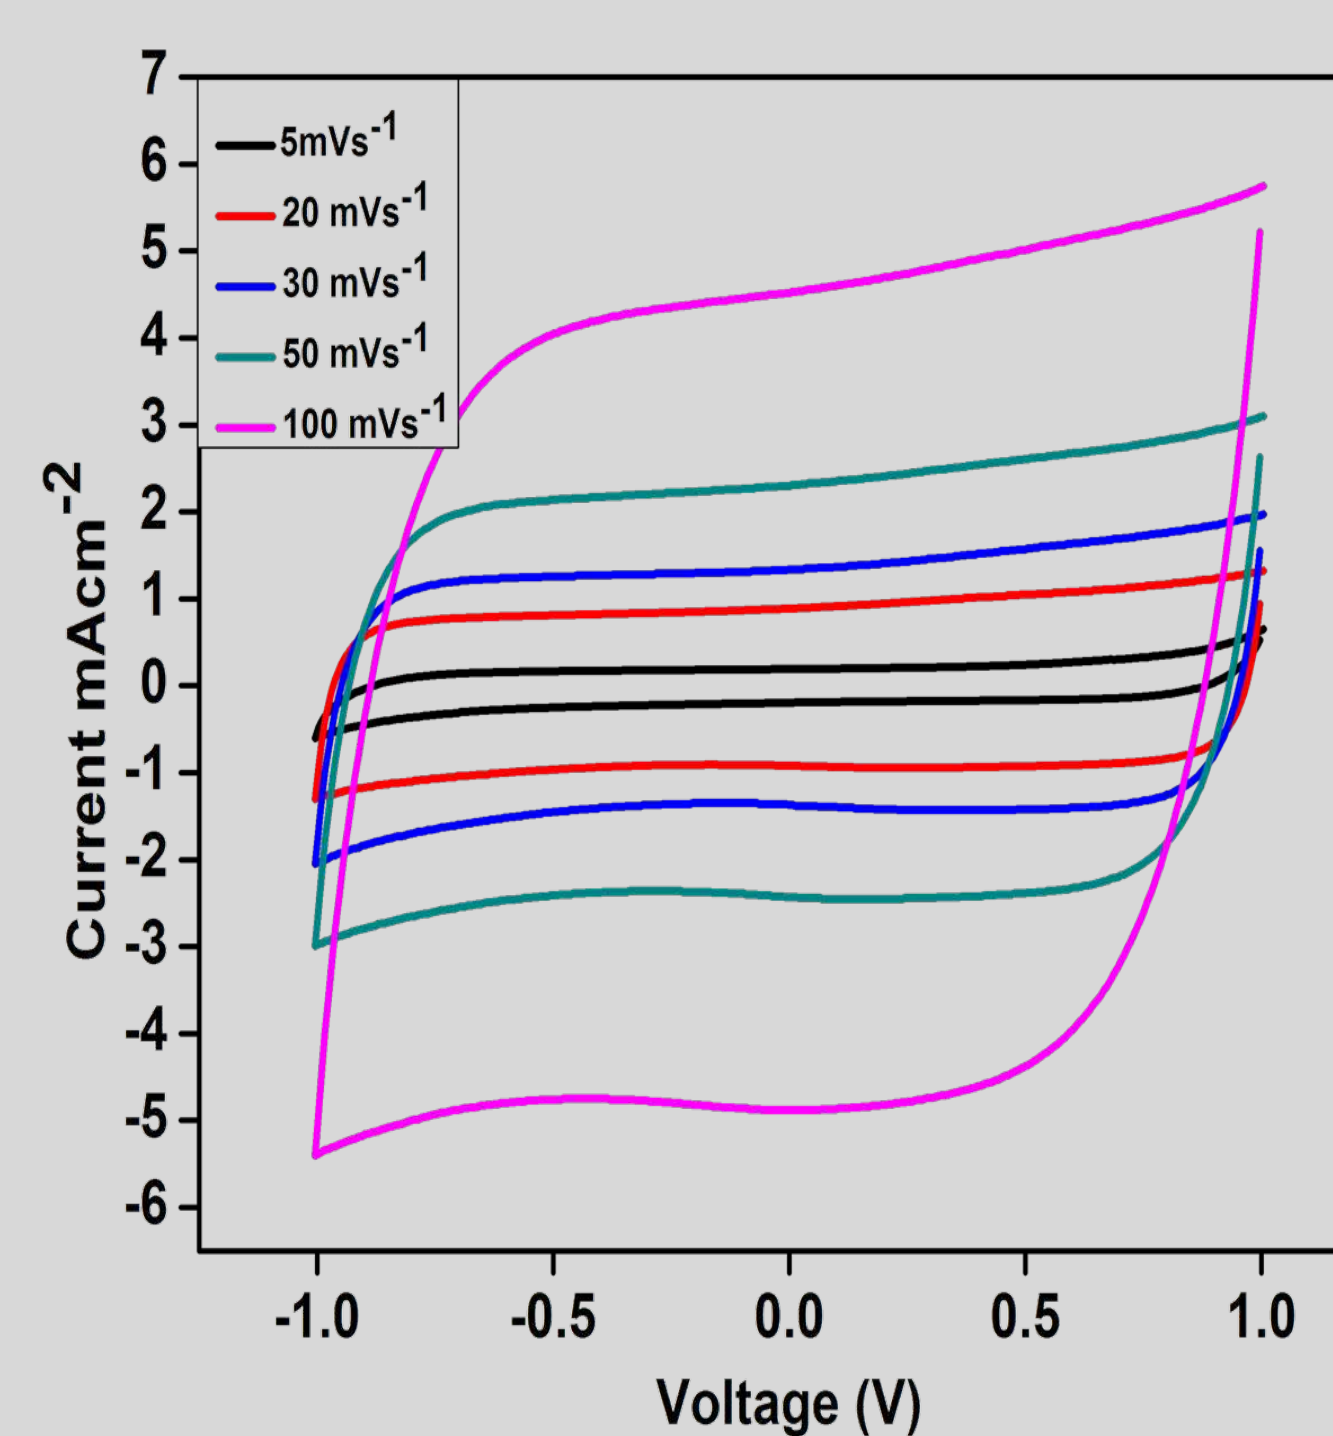

CONCLUSIONS

- A binder free, aqueous symmetric Ultracapacitor has been fabricated.
- A capacitance of 160 F/g at a current density of 1mAcm⁻² with excellent cycle stability. Activated carbon flexible Ultracapacitor will be a promising energy storage device.

ACKNOWLEDGEMENTS

National Institute of Technology Karnataka, Surathkal, India

Northumbria University, Newcastle, UK

Commonwealth Scholarship Commission, United Kingdom